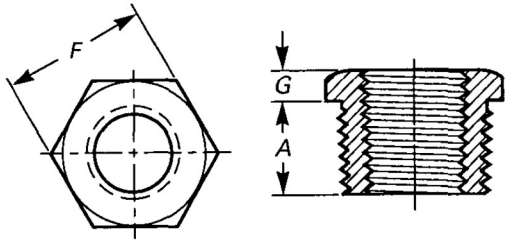



Aceros – Válvulas – Tuberías y Accesorios – Sistemas Contra Incendio

CLASS 3000
BUSHING REDUCTOR

 Conforme a:
 ASME B16.11 y ASTM A-105

NPS	DN	Longitud de Rosca Externa (min)		Cabeza hexagonal (min)		Altura de refuerzo cabeza hexagonal (min)		Peso Aprox	
		A		F		G		Kg	Lbs
		mm	pulg.	mm	pulg.	mm	pulg.		
3/8 X 1/4	10 X 8	12.2	0.48	10.2	0.40	10.2	0.40	0.02	0.04
1/2 X 1/4	15 X 8	14.2	0.56	8.1	0.32	8.1	0.32	0.03	0.07
1/2 X 3/8	15 X 10	14.2	0.56	10.4	0.41	10.4	0.41	0.045	0.10
3/4 X 1/4	20 X 8	16.0	0.63	8.1	0.32	8.1	0.32	0.05	0.11
3/4 X 3/8	20 X 10	16.0	0.63	9.1	0.36	9.1	0.36	0.049	0.11
3/4 X 1/2	20 X 15	16.0	0.63	13.5	0.53	13.5	0.53	0.048	0.11
1 X 1/4	25 X 6	19.0	0.75	8.1	0.32	8.1	0.32	0.09	0.20
1 X 1/2	25 X 15	19.0	0.75	10.9	0.43	10.9	0.43	0.089	0.20
1 X 3/4	25 X 20	19.0	0.75	12.7	0.50	12.7	0.50	0.088	0.19
1-1/4 X 1/2	32 X 15	20.3	0.80	10.9	0.43	10.9	0.43	0.25	0.55
1-1/4 X 3/4	32 X 20	20.3	0.80	12.7	0.50	12.7	0.50	0.24	0.53
1-1/4 X 1	32 X 25	20.3	0.80	14.7	0.58	14.7	0.58	0.22	0.49
1-1/2 X 1/2	40 X 25	21.1	0.83	14.7	0.58	14.7	0.58	0.34	0.75
1-1/2 X 3/4	40 X 20	21.1	0.83	12.7	0.50	12.7	0.50	0.33	0.73
1-1/2 X 1	40 X 25	21.1	0.83	14.7	0.58	14.7	0.58	0.32	0.71
1-1/2 X 1-1/4	40 X 32	21.1	0.83	19.6	0.77	19.6	0.77	0.3	0.66
2 X 1/2	50 X 15	21.1	0.83	19.6	0.77	19.6	0.77	0.45	0.99
2 X 3/4	50 X 20	21.1	0.83	19.6	0.77	19.6	0.77	0.44	0.97

Aceros – Válvulas – Tuberías y Accesorios – Sistemas Contra Incendio

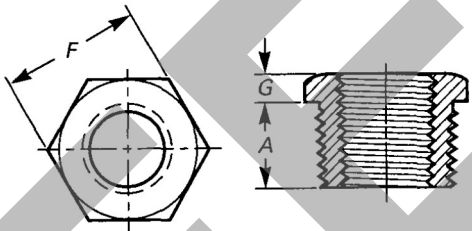NPS	DN	Longitud de Rosca Externa (min)		Cabeza hexagonal (min)		Altura de refuerzo cabeza hexagonal (min)		Peso Aprox	
		A		F		G		Kg	Lbs
		mm	pulg.	mm	pulg.	mm	pulg.		
2 X 1	50 X 25	22.4	0.88	14.7	0.58	14.7	0.58	0.42	0.93
2 X 1-1/4	50 X 32	22.4	0.88	17.0	0.67	17.0	0.67	0.4	0.88
2 X 1-1/2	50 X 40	22.4	0.88	17.8	0.70	17.8	0.70	0.38	0.84
2-1/2 X 1	65 X 25	27.2	1.07	14.7	0.58	14.7	0.58	0.6	1.32
2-1/2 X 1-1/4	65 X 32	27.2	1.07	17.0	0.67	17.0	0.67	0.58	1.28
2-1/2 X 2	65 X 50	27.2	1.07	19.0	0.75	19.0	0.75	0.56	1.23
3 X 1-1/2	80 X 40	28.7	1.13	17.8	0.70	17.8	0.70	1.16	2.56
3 X 2	80 X 50	28.7	1.13	19.0	0.75	19.0	0.75	1.14	2.51
3 X 2-1/2	80 X 65	28.7	1.13	23.4	0.92	23.4	0.92	1.11	2.45



Conforme a:
 ASME B16.11 y ASTM A-105