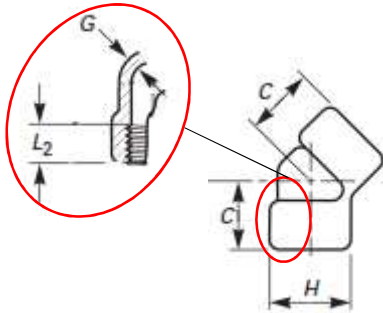


Aceros – Válvulas – Tuberías y Accesorios – Sistemas Contra Incendio

CLASS 3000
CODO 45° ROSCADO

Conforme a:
 ASME B16.11 y ASTM A-105

CODO 45° CLASS 3000 ROSCADO

Diámetro Nominal		Rating pressure	Diámetro Externo		Espesor de pared		Avance		Long de Rosca (min)		Peso nominal		
(NPS)	DN		Class		(H)		(G)		(C)		(L2)		Aprox
				mm	inch	mm	inch	mm	inch	mm	inch	Lb	Kg
1/4"	8	3000		25.0	0.98	3.30	0.130	19.0	0.75	10.20	0.40	0.25	0.11
3/8"	10	3000		33.0	1.30	3.51	0.138	22.0	0.87	10.40	0.41	0.53	0.24
1/2"	15	3000		38.0	1.50	4.09	0.161	25.0	0.98	13.60	0.54	0.78	0.35
3/4"	20	3000		46.0	1.81	4.30	0.169	28.0	1.10	13.90	0.55	1.20	0.54
1"	25	3000		56.0	2.20	4.98	0.196	33.0	1.30	17.30	0.68	1.90	0.86
1-1/4"	32	3000		62.0	2.44	5.28	0.208	35.0	1.38	18.00	0.71	2.30	1.04
1-1/2"	40	3000		75.0	2.95	5.56	0.219	43.0	1.69	18.40	0.72	4.60	2.09
2"	50	3000		84.0	3.31	7.14	0.281	44.0	1.73	19.20	0.76	5.12	2.32
2-1/2"	65	3000		102.0	4.02	7.65	0.301	52.0	2.05	28.90	1.14	7.70	3.49
3"	80	3000		121.0	4.76	8.84	0.348	64.0	2.52	30.50	1.20	12.00	5.44