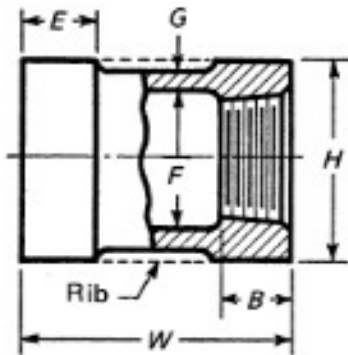


Aceros – Válvulas – Tuberías y Accesorios – Sistemas contra incendio

CLASS 300

 • **COUPLING**


NPS	DN	Long de Rosca (min)		Peso Aprox		Ancho del Reborde (min)		Diam. Interno (min)				Espesor de pared (min)		Diámetro externo del reborde (min)		Longitud	
		B		Kg	lbs	E		F				G		H		W	
		mm	pulg.			mm	pulg.	min	max	mm	pulg.	mm	pulg.	mm	pulg.	mm	pulg.
* 1/4	8	10.9	0.43	0.08	0.18	9.7	0.38	13.7	0.54	14.8	0.58	3.6	0.14	23.6	0.93	35.1	1.38
* 3/8	10	11.9	0.47	0.12	0.26	11.2	0.44	17.1	0.67	18.3	0.72	3.8	0.15	28.5	1.12	41.4	1.63
* 1/2	15	14.5	0.57	0.2	0.44	12.7	0.50	21.3	0.84	22.8	0.90	4.1	0.16	34.0	1.34	47.8	1.88
* 3/4	20	16.3	0.64	0.33	0.73	14.2	0.56	26.7	1.05	28.2	1.11	4.6	0.18	41.4	1.63	54.1	2.13
* 1	25	19.1	0.75	0.48	1.06	15.8	0.62	33.4	1.31	35.0	1.38	5.1	0.20	49.5	1.95	60.5	2.38
* 1-1/4	32	21.3	0.84	0.76	1.68	17.5	0.69	42	1.65	43.9	1.73	5.6	0.22	60.7	2.39	73.2	2.88
* 1-1/2	40	22.1	0.87	0.96	2.1	19.1	0.75	48.3	1.90	50.0	1.97	6.1	0.24	68.1	2.68	73.2	2.88
* 2	50	25.4	1.00	1.59	3.5	21.3	0.84	60.3	2.37	62.0	2.44	6.6	0.26	83.3	3.28	92.2	3.63
* 2-1/2	65	29.7	1.17	2.4	5.3	23.9	0.94	73.0	2.87	75.4	2.97	7.9	0.31	98.0	3.86	104.9	4.13
* 3	80	31.2	1.23	3.6	7.9	25.4	1.00	88.9	3.50	91.4	3.60	8.9	0.35	117.3	4.62	104.9	4.13

Acabado superficial disponible:

** Hierro Negro