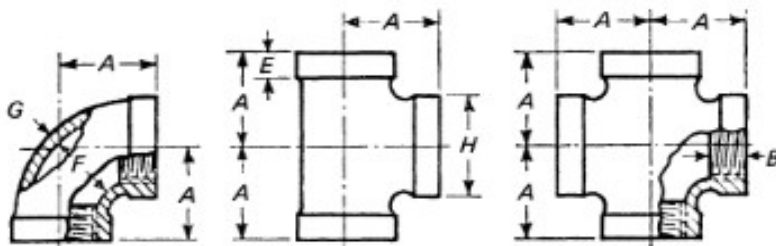


Aceros – Válvulas – Tuberías y Accesorios – Sistemas contra incendio

CLASS 150
• CRUZ RECTA

Cruz


		CRUZ				Long de Rosca (min)		Ancho del Reborde (min)		Diam. Interno (min)				Espesor de pared (min)		Diámetro externo del reborde (min)		
NPS	DN	A		Peso Aprox		B		E		F				G		H		
		mm	pulg	Kg	Lbs	mm	pulg	mm	pulg.	min		max		mm	pulg.	mm	pulg	
										mm	pulg	mm	pulg					
**	1/2	15	28.5	1.12	0.17	0.37	10.9	0.43	6.3	0.25	21.3	0.84	22.8	0.90	2.67	0.11	30.4	1.20
***	3/4	20	33.3	1.31	0.22	0.49	12.7	0.50	6.9	0.27	26.7	1.05	28.1	1.11	3.05	0.12	37	1.46
**	1	25	38.1	1.50	0.36	0.79	14.7	0.58	7.7	0.30	33.4	1.31	35.2	1.39	3.4	0.13	45	1.77
**	1-1/4	32	44.5	1.75	0.57	1.26	17	0.67	8.7	0.34	42.2	1.66	43.9	1.73	3.68	0.14	54.7	2.15
*	1-1/2	40	49.3	1.94	0.66	1.5	17.8	0.70	9.3	0.37	48.3	1.90	50.0	1.97	3.94	0.16	61.6	2.43
**	2	50	57.2	2.25	1.1	2.4	19.1	0.75	10.7	0.42	60.3	2.37	62.1	2.44	4.39	0.17	75.3	2.96
**	2-1/2	65	68.6	2.70	2.09	4.6	23.4	0.92	12.1	0.48	73	2.87	75.6	2.98	5.33	0.21	91.2	3.59
**	3	80	78.2	3.08	2.76	6.1	24.9	0.98	13.9	0.55	88.9	3.50	91.4	3.60	5.87	0.23	108.8	4.28

Acabado superficial disponible:

* Hierro Negro y Galvanizado en Caliente

** Hierro Negro

*** Galvanizado en caliente