
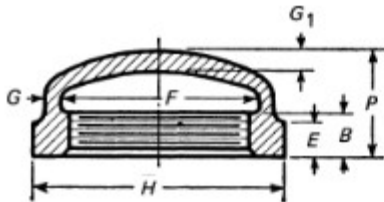


Aceros – Válvulas – Tuberías y Accesorios – Sistemas contra incendio

CLASS 300
• TAPON HEMBRA (CAPS)


NPS	DN	Long de Rosca (min)		Peso Aprox		Ancho del Reborde (min)		Diam. Interno (min)				Espesor de pared (min)		Diametro externo (min)		Altura (min)	
		B		E		F		G		H		P					
		mm	pulg	Kg	Lbs	mm	pulg	min	max	mm	pulg	mm	pulg	mm	pulg		
** 1/4	8	10.9	0.43	0.06	0.13	9.7	0.38	13.7	0.54	14.8	0.58	3.6	0.14	23.6	0.93	19.8	0.78
** 3/8	10	11.9	0.47	0.08	0.18	11.2	0.44	17.1	0.67	18.3	0.72	3.8	0.15	28.5	1.12	21.1	0.83
** 1/2	15	14.5	0.57	0.12	0.26	12.7	0.50	21.3	0.84	22.8	0.90	4.1	0.16	34.0	1.34	24.9	0.98
** 3/4	20	16.3	0.64	0.147	0.32	14.2	0.56	26.7	1.05	28.2	1.11	4.6	0.18	41.4	1.63	27.4	1.08
** 1	25	19.1	0.75	0.177	0.39	15.8	0.62	33.4	1.31	35.0	1.38	5.1	0.20	48.5	1.91	32.0	1.26
** 1-1/4	32	21.3	0.84	0.44	0.97	17.5	0.69	42.2	1.66	43.9	1.73	5.6	0.22	60.7	2.39	35.10	1.38
** 1-1/2	40	22.1	0.87	0.56	1.2	19.1	0.75	48.3	1.90	50.0	1.97	6.1	0.24	68.1	2.68	36.3	1.43
** 2	50	25.4	1.00	0.87	1.9	21.3	0.84	60.3	2.37	62.1	2.44	6.6	0.26	83.3	3.28	42.7	1.68
** 2-1/2	65	29.7	1.17	1.53	3.4	23.9	0.94	73.0	2.87	75.6	2.98	7.9	0.31	98.0	3.86	52.3	2.06
** 3	80	31.2	1.23	2.16	4.8	25.4	1.00	88.9	3.50	91.4	3.60	8.9	0.35	117.3	4.62	55.1	2.17

Acabado superficial disponible:

** Hierro Negro