


CLASS 150

- TEE



Tee

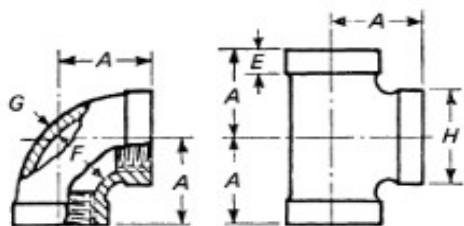

		TEE				Long de Rosca (min)		Ancho del Reborde (min)		Diam. Interno (min)				Espesor de pared (min)		Diámetro externo del reborde (min)	
NPS	DN	A		Peso Aprox		B		E		F				G		H	
		mm	pulg	Kg	Lbs	mm	pulg	mm	pulg	min		max		mm	pulg	mm	pulg
1/4	8	20.6	0.81	0.05	0.11	8.1	0.32	5.5	0.22	13.7	0.54	14.8	0.58	2.41	0.09	21.4	0.84
3/8	10	24.1	0.95	0.09	0.20	9.1	0.36	5.8	0.23	17.1	0.67	18.3	0.72	2.54	0.10	35.8	1.41
1/2	15	28.5	1.12	0.11	0.24	10.9	0.43	6.3	0.25	21.3	0.84	22.8	0.90	2.67	0.11	30.4	1.20
3/4	20	33.3	1.31	0.19	0.42	12.7	0.50	6.9	0.27	26.7	1.05	28.1	1.11	3.05	0.12	37	1.46
1	25	38.1	1.50	0.3	0.66	14.7	0.58	7.7	0.30	33.4	1.31	35.2	1.39	3.4	0.13	45	1.77
1-1/4	32	44.5	1.75	0.49	1.08	17	0.67	8.7	0.34	42.2	1.66	43.9	1.73	3.68	0.14	54.7	2.15
1-1/2	40	49.3	1.94	0.59	1.30	17.8	0.70	9.3	0.37	48.3	1.90	50	1.97	3.94	0.16	61.6	2.43
2	50	57.2	2.25	0.91	2.01	19.1	0.75	10.7	0.42	60.3	2.37	62.1	2.44	4.39	0.17	75.3	2.96

Conforme a:

MSS-SP-114 / ASME B16.3

ASTM A-351

ASME B1.20.1 (Rosca NPT)