


Aceros – Válvulas – Tuberías y Accesorios – Sistemas Contra Incendio

**TEE RECTA  
SCH 40 y STD**

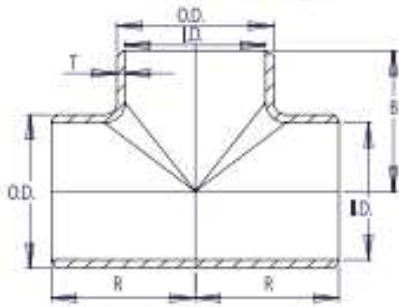

Conforme a:  
ASME B16.9 - ASTM A-234

Diámetro Nominal		Identificación		Diámetro Externo (OD)		Diámetro Interno (ID)		espesor de pared (T)		Centro a Centro (R)		Centro a Fin (B)		Peso nominal	
(NPS)	DN	Weight Class	Schedule N°	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	Lb	Kg
1/2"	15	STD	40	21.3	0.84	15.80	0.62	2.8	0.109	25.4	1.00	25.4	1.00	0.35	0.16
3/4"	20	STD	40	26.7	1.05	20.9	0.82	2.9	0.113	28.4	1.12	28.4	1.12	0.50	0.23
1"	25	STD	40	33.4	1.32	26.6	1.05	3.4	0.133	38.1	1.50	38.1	1.50	0.75	0.34
1-1/4"	32	STD	40	42.2	1.66	35.1	1.38	3.6	0.140	47.8	1.88	47.8	1.88	1.30	0.59
1-1/2"	40	STD	40	48.3	1.90	40.9	1.61	3.7	0.145	57.2	2.25	57.2	2.25	1.90	0.86
2"	50	STD	40	60.3	2.38	52.5	2.07	3.9	0.154	63.5	2.50	63.5	2.50	3.20	1.45
2-1/2"	65	STD	40	73.0	2.88	62.7	2.47	5.2	0.203	76.2	3.00	76.2	3.00	5.80	2.63
3"	80	STD	40	88.9	3.5	77.9	3.1	5.5	0.216	85.9	3.4	85.9	3.4	7.20	3.27
4"	100	STD	40	114.3	4.5	102.3	4.0	6.0	0.237	104.6	4.1	104.6	4.1	9.50	4.31
5"	125	STD	40	141.3	5.6	128.2	5.0	6.6	0.258	124.0	4.9	124.0	4.9	12.7	5.8
6"	150	STD	40	168.3	6.6	154.1	6.1	7.1	0.280	142.7	5.6	142.7	5.6	20.8	9.4
8"	200	STD	40	219.1	8.6	202.7	8.0	8.2	0.322	177.8	7.0	177.8	7.0	33.1	15.0
10"	250	STD	40	273.1	10.8	254.5	10.0	9.3	0.365	215.9	8.5	215.9	8.5	56.5	25.6
12"	300	STD	40	323.9	12.8	304.8	12.0	9.5	0.375	254.0	10.0	254.0	10.0	90.9	41.2
14"	350	STD	30	355.6	14.0	336.6	13.3	9.5	0.375	279.4	11.0	279.4	11.0	162.0	73.5
16"	400	STD	30	406.4	16.0	387.4	15.3	9.5	0.375	304.8	12.0	304.8	12.0	206.0	93.4
18"	450	STD	-	457.2	18.0	438.2	17.3	9.5	0.375	342.9	13.5	342.9	13.5	272.0	123.4
20"	500	STD	20	508.0	20.0	489.0	19.3	9.53	0.375	381.0	15.0	381.0	15.0	350.0	158.8