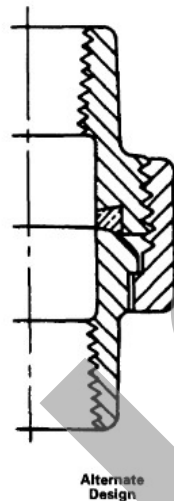
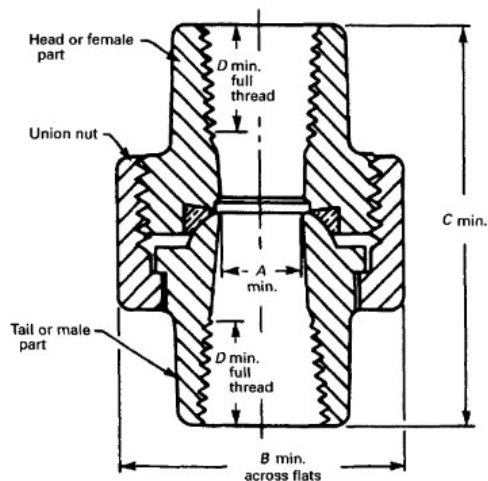


**CLASS 300**
**• UNION UNIVERSAL**


| NPS      | DN | Diam. Interno |      | Ancho   |      | Altura  |      | Long de Rosca |      | Peso Aprox |      |
|----------|----|---------------|------|---------|------|---------|------|---------------|------|------------|------|
|          |    | A (min)       |      | B (min) |      | C (min) |      | D (min)       |      | Kg         | Lbs  |
|          |    | mm            | pulg | mm      | pulg | mm      | pulg | mm            | pulg |            |      |
| ** 1/4   | 8  | 7.5           | 0.30 | 34.0    | 1.34 | 39.5    | 1.56 | 11.0          | 0.43 | 0.12       | 0.26 |
| ** 3/8   | 10 | 10.5          | 0.41 | 38.0    | 1.50 | 43.5    | 1.71 | 12.0          | 0.47 | 0.17       | 0.37 |
| ** 1/2   | 15 | 13.5          | 0.53 | 44.5    | 1.75 | 46.0    | 1.81 | 14.5          | 0.57 | 0.23       | 0.51 |
| ** 3/4   | 20 | 19.0          | 0.75 | 54.5    | 2.15 | 54.0    | 2.13 | 16.5          | 0.65 | 0.34       | 0.75 |
| ** 1     | 25 | 24.0          | 0.94 | 63.0    | 2.48 | 58.5    | 2.30 | 19.0          | 0.75 | 0.54       | 1.19 |
| ** 1-1/4 | 32 | 32.5          | 1.28 | 76.5    | 3.01 | 67.5    | 2.66 | 21.5          | 0.85 | 0.85       | 1.87 |
| ** 1-1/2 | 40 | 38.0          | 1.50 | 83.5    | 3.29 | 72.5    | 2.85 | 22.0          | 0.87 | 1.14       | 2.51 |
| ** 2     | 50 | 49.0          | 1.93 | 100.5   | 3.96 | 82.0    | 3.23 | 25.5          | 1.00 | 1.95       | 4.30 |
| ** 2-1/2 | 65 | 59.0          | 2.32 | 120.0   | 4.72 | 84.5    | 3.33 | 29.5          | 1.16 | 2.73       | 6.02 |
| ** 3     | 80 | 73.5          | 2.89 | 136.5   | 5.37 | 104.0   | 4.09 | 31.0          | 1.22 | 3.61       | 7.96 |

**Acabado superficial disponible:**

\*\* Hierro Negro