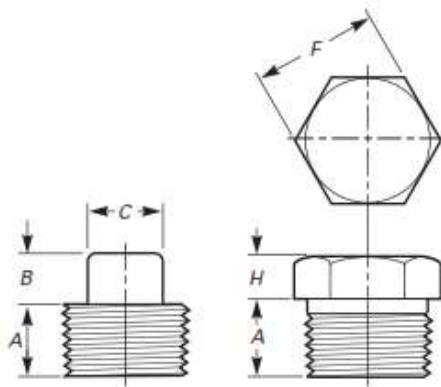


**CLASS 3000**
**TAPON MACHO (PLUG) ROSCADO**


Conforme a:  
 ASME B16.11 y ASTM A-105

**TAPON MACHO CLASS 3000 CON ROSCA**

Diámetro Nominal		Rating pressure	Longitud Rosca		Cabeza Cuadrada				Cabeza Hexagonal				Peso nominal	
(NPS)	DN		(A)		(B)		(C)		(F)		(H)		Aprox	
		Class	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	Lb	Kg
1/4"	8	3000	11.0	0.43	6.00	0.236	9.6	0.38	15.88	0.625	6.0	0.24	0.05	0.02
3/8"	10	3000	13.0	0.51	8.00	0.315	11.1	0.44	17.46	0.687	8.0	0.31	0.09	0.04
1/2"	15	3000	14.0	0.55	10.00	0.394	14.3	0.56	22.23	0.875	8.0	0.31	0.13	0.06
3/4"	20	3000	16.0	0.63	11.00	0.433	15.9	0.63	26.99	1.063	10.0	0.39	0.27	0.12
1"	25	3000	19.0	0.75	13.00	0.512	20.6	0.81	34.93	1.375	10.0	0.39	0.48	0.22
1-1/4"	32	3000	21.0	0.83	14.00	0.551	23.8	0.94	44.45	1.750	14.0	0.55	0.94	0.43
1-1/2"	40	3000	21.0	0.83	16.00	0.630	28.6	1.13	50.80	2.000	16.0	0.63	1.20	0.54
2"	50	3000	22.0	0.87	18.00	0.709	53.3	2.10	63.50	2.500	18.0	0.71	2.40	1.09